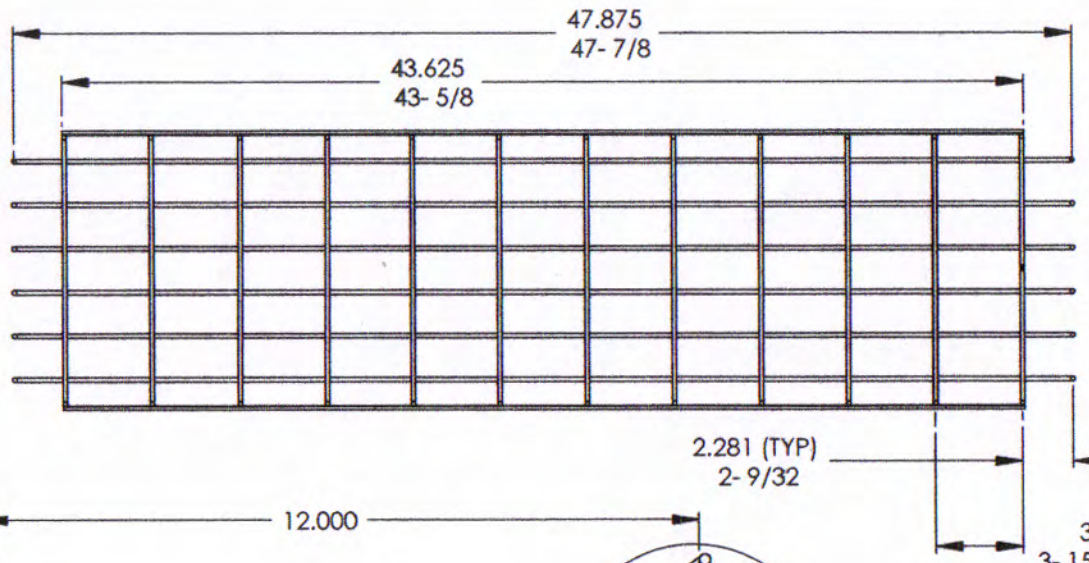

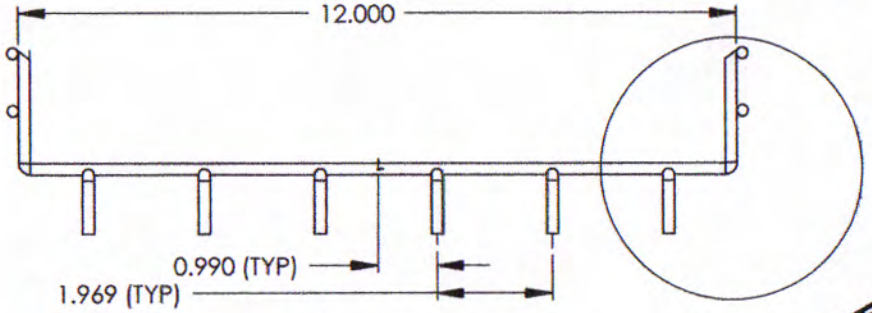

A

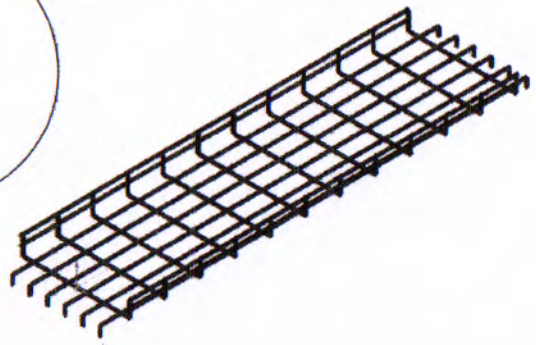

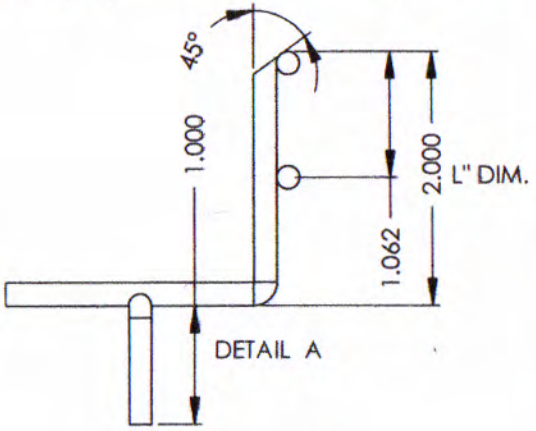

COMPONENT LIST			
L" DIM.	ITEM	MAKE FROM	DESCRIPTION
		P/N FT XX 12X48	CO WIRE .196 DIA.
2"		2X24X24	
4"		4X24X24	
6"		6X24X24	

GENERAL NOTES:

A) MATERIAL TO BE HOT DIPPED, PRE-GALVANIZED STEEL, ASTM A641, TO AVOID THE FORMATION OF ZINC WHISKERS.

B) FINISH (CARBON STEEL WIRE ONLY).
1) ELECTRODEPOSITED ZINC, TYPE III FINISH SERVICE CONDITION (ONE) PER ASTM B633.
2) POLYESTER POWDER COATING 1.2 - 3.0 MILS THICK.

C) DIMENSIONAL TOLERANCES
1) GENERAL DIMENSIONS +/- 1/8" U.N.D.
2) LENGTH +/- 1/4"
3) WIDTH +/- 1/8"
4) DEPTH +/- 1/8"
5) ANGULAR FORMATION +/- 3 DEG.
6) CAMBER SHALL NOT EXCEED 1/2" ON STANDARD 10' LENGTH.
7) TWIST SHALL NOT EXCEED 1/2" ON STANDARD 10' LENGTH

D) RIB VICE DIAMETER
1) .197 (5MM) DIAMETER.

E) LONGITUDINAL WIRE DIAMETER.
1) .197 (5MM) DIAMETER

F) CROSS SECTION AREA
AREA = (20 WIRES X .0438 IN2)= .876 IN2
UL MARKING = .8 IN2

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.

DEBUR AND BREAK SHARP EDGES

REVISION	NAME	CHANGE	DATE
A	AF		3-7-10

MATERIAL:

WEIGHT:

act
Access Cable Trays Inc,

TITLE:
FLOORFLEX-TRAY

DWG NO.
FT XX 12 X 48

A4

SHEET 1 OF 1