GENERAL NOTES:

A) MATERIAL TO BE HOT DIPPED, PRE-GALVANIZED STEEL, ASTM A641 . TO AVOID THE FORMATION OF ZINC WHISKERS.

B) FINISH: (CARBON STEEL WIRE ONLY).
1) POLYESTER POWDER COATING 1.2 - 3.0 MILS THICK.

C) DIMENSIONAL TOLERANCES
1) GENERAL DIMENSIONS +/- 1/8" U.N.D.
2) LENGTH +/- 1/4"
3) WIDTH +/- 1/8"
4) DEPTH +/- 1/8"
5) ANGULAR FORMATION +/- 3 DEG.
6) CAMBER SHALL NOT EXCEED 1/2" ON STANDARD 10' LENGTH.
7) TWIST SHALL NOT EXCEED 1/2" ON STANDARD 10' LENGTH

D) RIB VICE DIAMETER
1) .197 (5MM) DIAMETER.

E) LONGITUDINAL WIRE DIAMETER.
1) .197 (5MM) DIAMETER

F) CROSS SECTION AREA
AREA = (20 WIRES X .0438 IN2)= .876 IN2
UL MARKING = .8 IN2

COMPONENT LIST			
L" DIA.	ITEM	MAKE FROM	DESCRIPTION
		P/N. FT XX 24X48	CO WIRE .196 DIA.
2"		2X24X48	
4"		4X24X48	
6"		6X24X48	

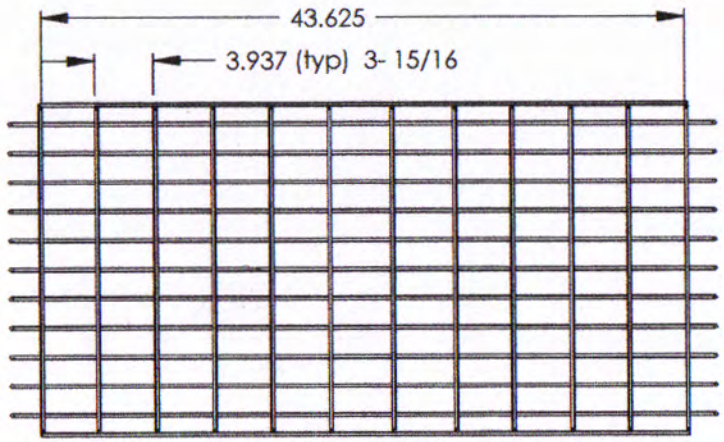

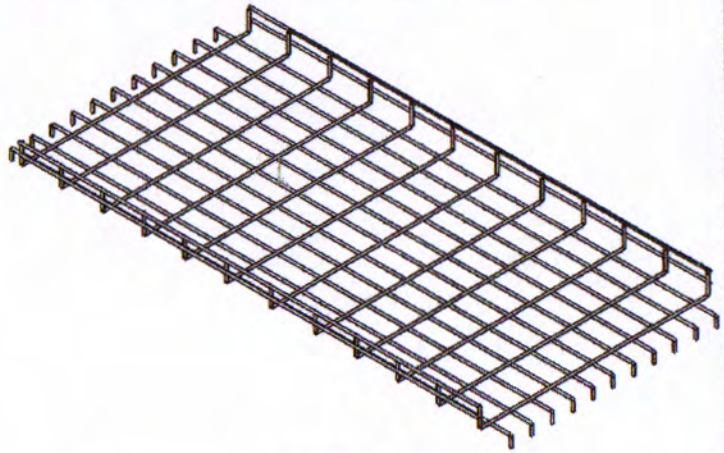

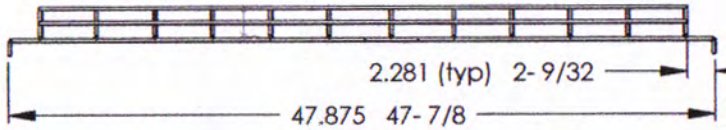

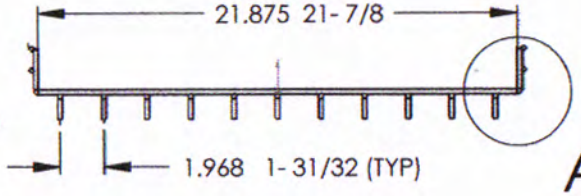

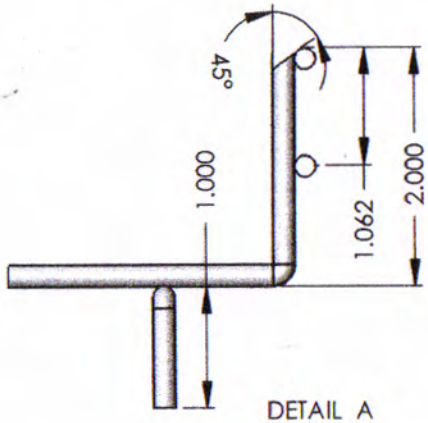

DETAIL A

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES.

DEBUR AND BREAK SHARP EDGES

REVISION	NAME	CHANGE	DATE
A	AF		5-12-10

MATERIAL:

WEIGHT:

act
Access Cable Trays Inc.

TITLE:
FLOORFLEX-TRAY

DWG NO.
FT XX 24 X 48

SHEET 1 OF 1