Mounting Kits

Mounting Bracket Kits

Mounting bracket kits are field installable. Composite and stainless steel kits are related to Type 4X. Composite kits are rated for 500 lbs. maximum load. Kit includes 4 brackets and mounting hardware for all Type 1 DataCom wall-mount and COMLINE® enclosures.

DMFK1 and DMFK2 include two 14 gauge steel external mounting brackets and fasteners. Mounting bracket kit CMFK and CMFKSS each contain four 12 gauge steel or Type 304 stainless steel external mounting brackets and fasteners. Sealing washers are provided with each kit to maintain Type 4 or 12 rating after installation. Steel mounting brackets are plated.

Catalog Number	Description
DMFK1	Mounting bracket kit
DMFK2	Mounting bracket kit
CMFK	Steel mounting kit
CMFKSS	Stainless steel mounting bracket kit
CMTGFT	Composite mounting bracket kit



ULTRX® Mounting Bracket Kit



Kit is field installable. Corrosion-resistant fiberglass material is rated Type 4X. Type 316 stainless steel mounting hardware is included. Four mounting brackets per kit. Maintains UL 508A, 508 Type 3, 3R, 4, 4X, and 13 ratings.

Catalog Number	Description	Kit Qty.
UUMF	Mounting Bracket Kit	4

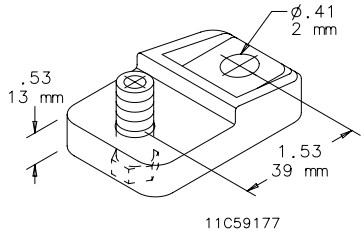

Pole Mounting Kits



Enable COMLINE®, CONCEPT®, DataCom, and wall-mount enclosures to be mounted to poles of various sizes and shapes. Attach the galvanized steel channel bar to the mounting holes at the back of the enclosure, then wrap the stainless steel strap around the pole and through the bar. Kit includes two mounting channels, two straps suitable for up to 12-in. diameter pole, and mounting hardware.

Catalog Number	Fits Enclosure
CPMK12	when B = 12.00 in. (305mm)
CPMK16	when B = 16.00 in. (406mm)
CPMK20	when B = 20.00 in. (508mm)
CPMK24	when B = 24.00 in. (610mm)
CPMK30	when B = 30.00 in. (762mm)

Bottom Support Kit

Bolt-in bottom support plate with mounting hardware. Coated with ANSI 61 gray polyester powder paint. Required when installing Hoffman floor stands or casters on A17 fiberglass free-standing enclosures.

Catalog Number	Use With
A17SUPPORT1	A17 Single-Door Fiberglass Enclosures
A17SUPPORT2	A17 Two-Door Fiberglass Enclosures





Unistrut Mounting Kit

Bolt-in internal unistrut channel (8 pieces) with mounting hardware. Required to install Hoffman unistrut-mounted free-stand panels and accessories in two-door A17 fiberglass enclosures. Hoffman A17SUPPORT2 plate must also be installed to secure unistrut.

Catalog Number	Use With
A17UNISTRUT	A17 Two-Door Fiberglass Enclosures



Subject to change without notice
PH 763 422 2211 • FX 763 422 2600 • www.hoffmanonline.com
© 2007 Hoffman Enclosures Inc.

Mounting Kits

Floor Stand Kit

Steel Floor Stand (kit includes two stands)

Kits are easily installed on most wall-mounted Hoffman enclosures. Can also be used to elevate Hoffman free-standing enclosures. To install, drill holes in the bottom of the enclosure and bolt the floor stands to the enclosure. It is not necessary to remove the wall-mounting brackets from the enclosure. Each kit includes two stands. Two sets of floor stands are recommended for double door free-standing enclosures. 12 gauge steel floor stand has a ANSI 61 gray polyester powder finish over phosphatized surfaces. Stainless steel floor stand is Type 304. Special heights, depths, materials, and finishes can be provided on custom order. Consult factory for information.

Product maintains UL/CSA Type 4 and Type 12 when properly installed on Hoffman Type 4 or Type 12 enclosures.

Catalog Number	Material	H (in.)	H (mm)	C (in.)	C (mm)	L (in.)	L (mm)
AFK0608	Steel	6	152	8.06	205	7.06	179
AFK0610	Steel	6	152	10.06	256	7.06	179
AFK0612	Steel	6	152	12.06	306	7.06	179
AFK0618	Steel	6	152	18.06	459	7.06	179
AFK1208	Steel	12	305	8.06	205	8.12	206
AFK1210	Steel	12	305	10.06	256	8.12	206
AFK1212	Steel	12	305	12.06	306	8.12	206
AFK1216	Steel	12	305	16.06	408	8.12	206
AFK1218	Steel	12	305	18.13	461	8.12	206
AFK1220	Steel	12	305	20.06	510	8.12	206
AFK1808	Steel	18	457	8.06	205	9.17	233
AFK1810	Steel	18	457	10.06	256	9.17	233
AFK1812	Steel	18	457	12.06	306	9.17	233
AFK1816	Steel	18	457	16.06	408	9.17	233
AFK2408	Steel	24	610	8.06	205	10.23	260
AFK2410	Steel	24	610	10.06	256	10.23	260
AFK2412	Steel	24	610	12.06	306	10.23	260
AFK2416	Steel	24	610	16.06	408	10.23	260
AFK1208SS	Stainless Steel	12	305	8.06	205	9.09	231
AFK1210SS	Stainless Steel	12	305	10.06	256	9.09	231
AFK1212SS	Stainless Steel	12	305	12.06	306	9.09	231
AFK1216SS	Stainless Steel	12	305	16.06	408	9.09	231
AFK1218SS	Stainless Steel	12	305	18.06	459	9.09	231
AFK1224SS	Stainless Steel	12	305	24.06	611	9.09	231
AFK2410SS	Stainless Steel	24	610	10.06	256	9.09	231
AFK2412SS	Stainless Steel	24	610	12.06	306	9.09	231

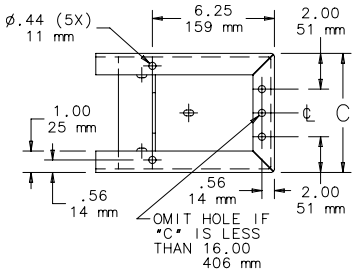



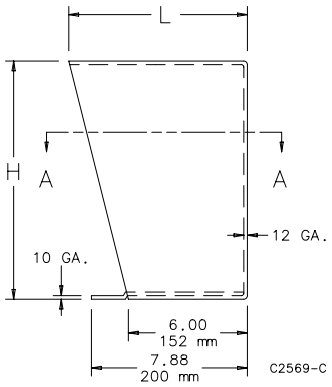

PROLINE® Frame Floor Mounting Bracket

Provides a structural method of bolting a PROLINE® frame to the floor. Fits all frame sizes. Made of 12 gauge steel with plated finish. Kit includes four brackets and mounting hardware.

NOTE: Not for use on colocation frames, which include welded-in floor mounting brackets.

Catalog Number	Description
PFBK	PROLINE Frame Floor Mounting Bracket

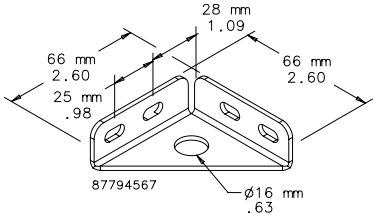

 © 2007 Hoffman Enclosures Inc.