


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

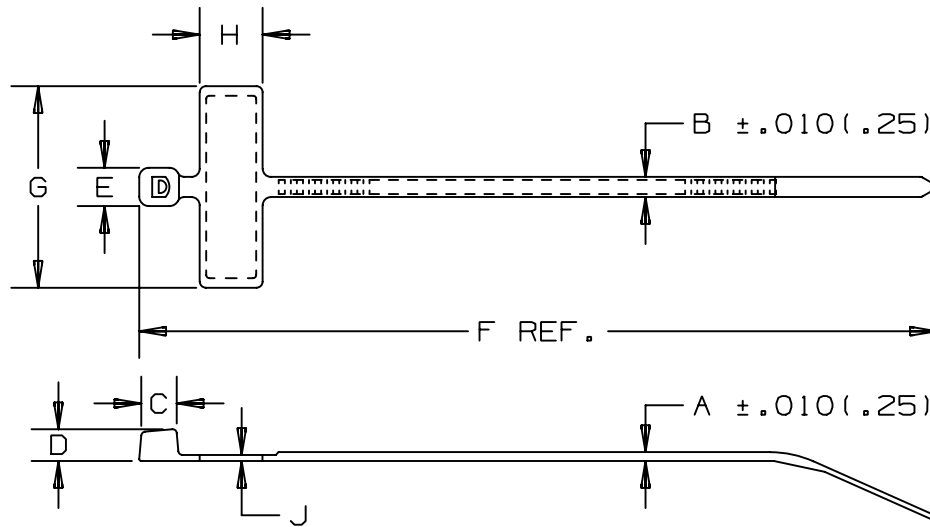

PANDUIT * PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	H in (mm)	J in (mm)	WRITE-ON AREA in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT (g) lbs./100 pcs.
	MIN. in (mm)	MAX. in (mm)													
PLM1M-69	.18 (4.8)	.75 (19)	.035 (.9)	.098 (2.5)	.169 (4.3)	.154 (3.9)	.180 (4.6)	3.9 (99)	.98 (24.9)	.31 (7.9)	.03 (.8)	.26 x .95 (6.6 x 24.1)	18 (80)	MINIATURE	.11 (48)

NOTES:

- *1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- 2) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.
- 3) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 248°F (120°C).
- 4) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 5) MINIMUM LOOP TENSILE RATING AT 120°F (49°C)/20% RH.
- 6) COLOR: NATURAL--OFF WHITE.

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS.

SS_26823_00.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

PAN-TY MARKER TIE
FLAME RETARDANT SERIES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .0005 (.0127) (.XXX) ± .001 (.0254)
(.XX) ± .002 (.0508) ANGLES ± .0005

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
R. MARCUS

MAT'L:

SCALE
NONE

DATE
5/19/93

FLAME RETARDANT
NYLON 6/6

DRAWING NO.

SS-26823

DWG
A
SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
3	4/11/05	ERW		CORRECTED BUNDLE DIAMETER MEASUREMENT.	26823	3		