THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

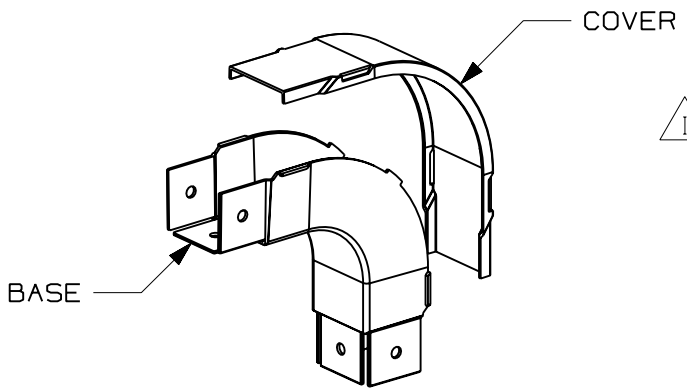


| PANDUIT PART NUMBER | WEIGHT |
|---|---|
| FOVRA2X2 | 0.31 LB/EACH (140g/EACH) |

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. THE FIBER-DUCT 2x2 AND FIBERRUNNER 2x2 OUTSIDE VERTICAL RIGHT ANGLE FITTING IS DESIGNED WITH A MINIMUM 2" (50.8) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.

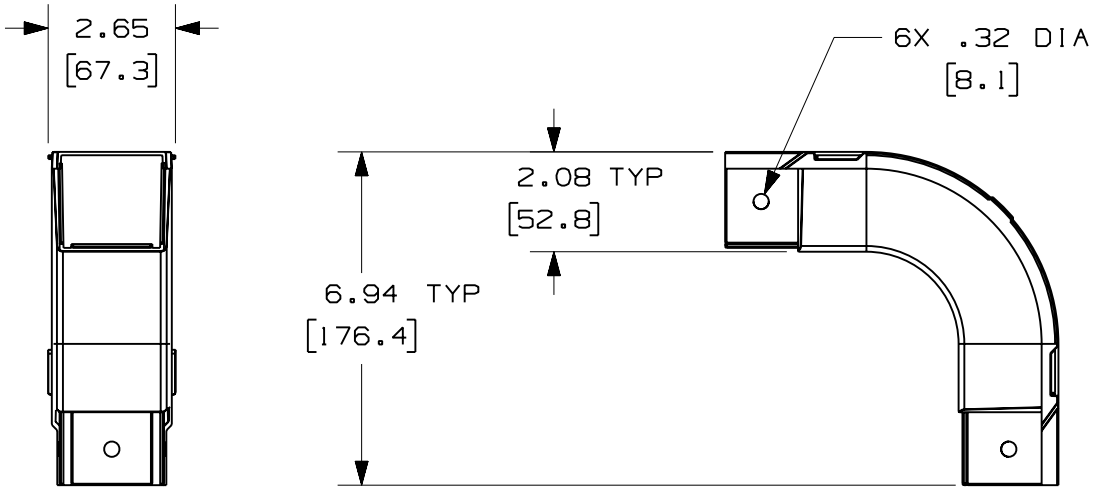




ENG. REF.: D35245BY_DC_FOVRA2X2_04.prt

CAD FILENAME/LAYERS: FOVRA2X2.pdf

PANDUIT CORP TINLEY PARK, ILLINOIS

FIBER-DUCT 2x2 AND FIBERRUNNER 2x2 OUTSIDE VERTICAL RIGHT ANGLE FITTING (FOVRA2X2)

CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ±.03 (.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: RCA
DATE: 2-5-97
CHK'D: CEF
MAT'L: ABS
SCALE: NONE
DRAWING NO.: 35245-25
DWG: A
SIZE

| REV | DATE | BY | CHK | DESCRIPTION | ECN | - | R | CUST | SUP | GMBH |
|---|---|---|---|---|---|---|---|---|---|---|
| - | -------- | --- | --- | I. REVISED GENERAL NOTES. H. REVISED PART WEIGHT. | -------- | | -- | -- | | |
| - | -------- | --- | --- | G. REVISED MATERIAL. F. REVISED DRAWING TITLE. | -------- | | -- | -- | | |
| 4 | 12-15-06 | MSO | RN | E. REVISED CAD FILENAME. D. REVISED AND REDRAWN. | 35245-25 | | RN | RN | | |