





PANDUIT PART NUMBER	WEIGHT
FR6TRBE12 FR6TRBE12M	1.13 LB/EACH (513g/EACH)



NOTES:

- SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE PACKAGE QUANTITY.
- THE FIBERRUNNER 4x4 AND 6x4 QUIKLOCK EXISTING THREADED ROD BRACKET IS USED TO SUPPORT THE FIBERRUNNER 4x4 AND/OR 6x4 CABLE ROUTING SYSTEMS FROM A SECTION OF EXISTING 1/2" (M12) THREADED ROD.
- THE FIBERRUNNER 4x4 AND 6x4 QUIKLOCK EXISTING THREADED ROD BRACKET INCLUDES:
ONE (1) BRACKET ASSEMBLY,
TWO (2) 1/2-13 SPLIT LOCK NUTS (FR6TRBE12 ONLY),
TWO (2) M12x1.75 SPLIT LOCK NUTS (FR6TRBE12M ONLY).
- DIMENSIONS IN PARENTHESES ARE IN METRIC.

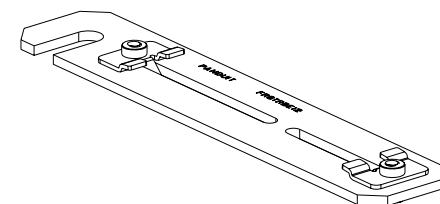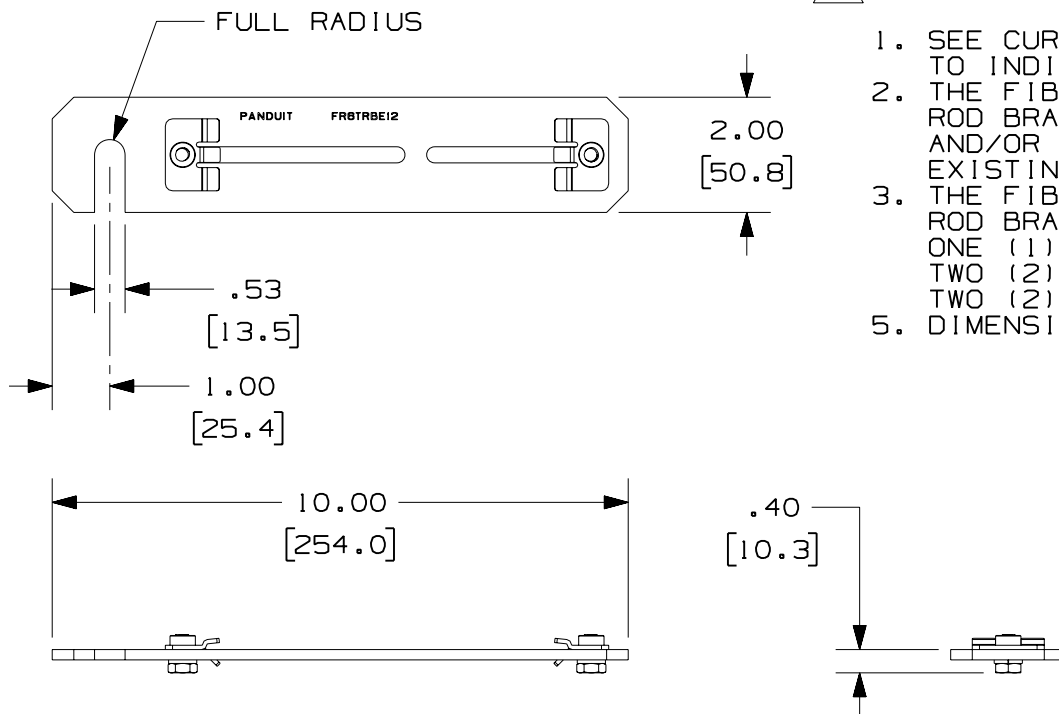

ENG. REF.: D37585BB_DC_FR6TRBE12_01.prt

CAD FILENAME/LAYERS **FR6TRBE12.pdf**

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	GMBH
-	-----	---	--	H. REMOVED ALL REFERENCES TO FR6TRBE58	-----	--	--		
-	-----	---	--	G. REVISED TO INCLUDE FR6TRBE12M	-----	--	--		
-	-----	---	--	F. REVISED PART WEIGHT E. REVISED CHART	-----	--	--		
-	-----	---	--	D. REVISED GENERAL NOTES C. REVISED CAD FILENAME	-----	--	--		
1	8-2-06	MSO	RN	B. REVISED DRAWING TITLE A. REVISED AND REDRAWN	37585-24	RN	RN		

PANDUIT CORP TINLEY PARK, ILLINOIS

FIBERRUNNER 4x4 AND 6x4 QUIKLOCK EXISTING THREADED ROD BRACKET - 1/2" (M12) THREADED ROD (FR6TRBE12, FR6TRBE12M) **CUSTOMER DRAWING**

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
 (.X) ± (.XXX) ±
 (.XX) ± .03 (.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

SCALE: **NONE**

DRAWING NO.: **37585-24** DWG SIZE: **A**

DRAWN BY: **MSO** MAT'L: **STEEL**

DATE: **5-11-00**

CHK'D: **CVV**