

NEW!


Pan-Steel® MS75 Metal Strapping System

Mechanical fastening applications demand high quality systems that can withstand harsh environments while maintaining a safe and secure physical infrastructure. Severe weather, intense UV rays, high vibration, and galvanic corrosion are all variables that can sacrifice performance and create safety hazards. Panduit offers innovative solutions that provide reliable fastening of critical components which allows businesses to minimize risk and enhance productivity.

The Pan-Steel® MS75 Metal Strapping System delivers maximum performance, high strength, and enhanced job site safety, ideal for the Sign and Signal, Oil and Gas and Industrial markets. Designed to work together in extreme conditions, the MS75 metal strapping, buckles, and installation tool reduce installation time by as much as 50%, when compared to competitive offerings. This system is part of the complete range of harsh environment solutions available from Panduit.




Buckle Bridge Teeth
Deliver additional body slip resistance for optimum strength

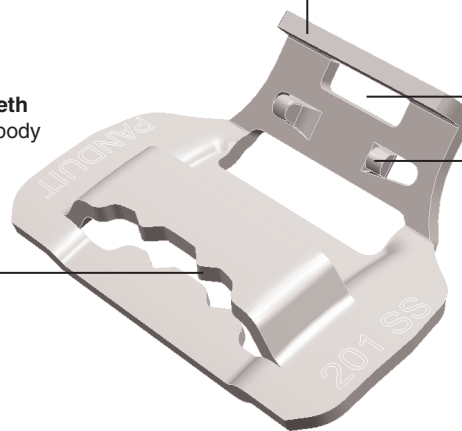


Hooked Clamping Tab
Provides full coverage of cut end of strap for enhanced safety

Buckle Screwdriver Slot
Allows use of screwdriver for buckle closure for a simple quick installation

Buckle Locking Tabs 
Improved locking mechanism for higher strength


Key Features

Benefits

MS75 Strapping and Buckles	
Buckle locking tabs 	Improved locking mechanism for higher strength
Buckle screwdriver slot	Allows use of screwdriver for buckle closure for a simple, quick installation
Hooked clamping tab	Provides full coverage of cut end of strap for enhanced safety
Buckle bridge teeth	Deliver additional body slip resistance for optimum strength
Fully assembled discrete lengths	Eliminates assembly, reducing installation time by as much as 50%, when compared to competitive designs
Weather resistant packaging for coils	Maintains package integrity when compared to the traditional cardboard carton for improved water resistance and durability
Smooth surfaces and rounded edges	Assures worker safety and bundle protection from abrasion during and after installation
Compatible with industry standard tools	No new installation tools are required
BT75SDT MS75 Strapping Installation Tool	
Screw drive tension mechanism	Provides high tension to secure bundle with minimal handle effort, for improved productivity
Robust design	Heavy duty construction offers a long term service life

Pan-Steel® MS75 Metal Strapping System

Simple 5-Step Installation Process Reduces Installation Time and Installed Costs



1) Place strap around the material, insert tail of strap through buckle. Pull strapping tight and bend up to hold in place.



2) Insert tail of strapping into tool nose section. Rotate handle to tension.



3) After tensioning, raise tool 90° – 120° over buckle and pull down on cutter lever, cutting strap.



4) Remove tool, press cut end down toward retaining tab.




5) Using a flathead screwdriver, bend retaining tab down and over cut end.

Provides finished, safe, and secure closure.



Ordering Information

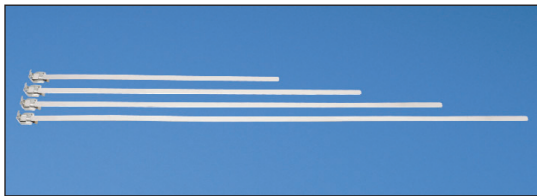


MS75 Strapping in 4 Discrete Lengths



MS75 Strapping in Weather Resistant Packaging



MS75 Buckles



MS75 Installation Tool

Part Number	Max. Bundle Diameter				Length		Strap Breaking Strength		Min. Bundle Diameter		Width		Thickness		Recommended Installation Tool	Std. Pkg. Qty. [^]
	Single Loop		Double Loop													
	In.	mm	In.	mm	In.	mm	Lbs.	N	In.	mm	In.	mm	In.	mm		
MS75 Metal Strapping – Discrete Lengths																
MS4W75T30-Q2	4.0	102	2.0	51	20.2	513	2400	10656	2.0	51	0.75	19.1	0.03	0.76	BT75SDT	25
MS6W75T30-Q2	6.0	152	3.0	76	26.5	673	2400	10656	2.0	51	0.75	19.1	0.03	0.76	BT75SDT	25
MS8W75T30-Q2	8.0	203	4.0	102	32.7	831	2400	10656	2.0	51	0.75	19.1	0.03	0.76	BT75SDT	25
MS10W75T30-Q2	10.0	254	5.0	127	39.0	991	2400	10656	2.0	51	0.75	19.1	0.03	0.76	BT75SDT	25

Part Number	Length		Strap Breaking Strength		Min. Bundle Diameter		Width		Thickness		Recommended Installation Tool	Used with Buckle	Std. Pkg. Qty. [^]
	Ft.	m	Lbs.	N	In.	mm	In.	mm	In.	mm			
MS75 Metal Strapping – Coil													
MSW75T30-CR2	100	30.5	2400	10656	2.0	51	0.75	19.1	0.03	0.76	BT75SDT	MSBW75-C2	1

Part Number	Width		Part Description	Std. Pkg. Qty. [^]
	In.	mm		
MS75 Metal Strapping – Buckles				
MSBW75-C2	1.64	42	Individual buckles used with metal strapping.	100

BT75SDT Installation Tool for MS75 Strapping

Part Number	Part Description	Std. Pkg. Qty. [^]
BT75SDT	Installation tool for use with .75" width strapping only. Tensions and cuts strapping. Screwdriver required for buckle closure not included.	1

[^]Order number of pieces required in multiples of Standard Package Quantity.

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.33.777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800-777-3300 and reference SSCB24



©2010 Panduit Corp.
ALL RIGHTS RESERVED.
Printed in the U.S.A.
Product Bulletin Number SA-SSCB24
9/2010