


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

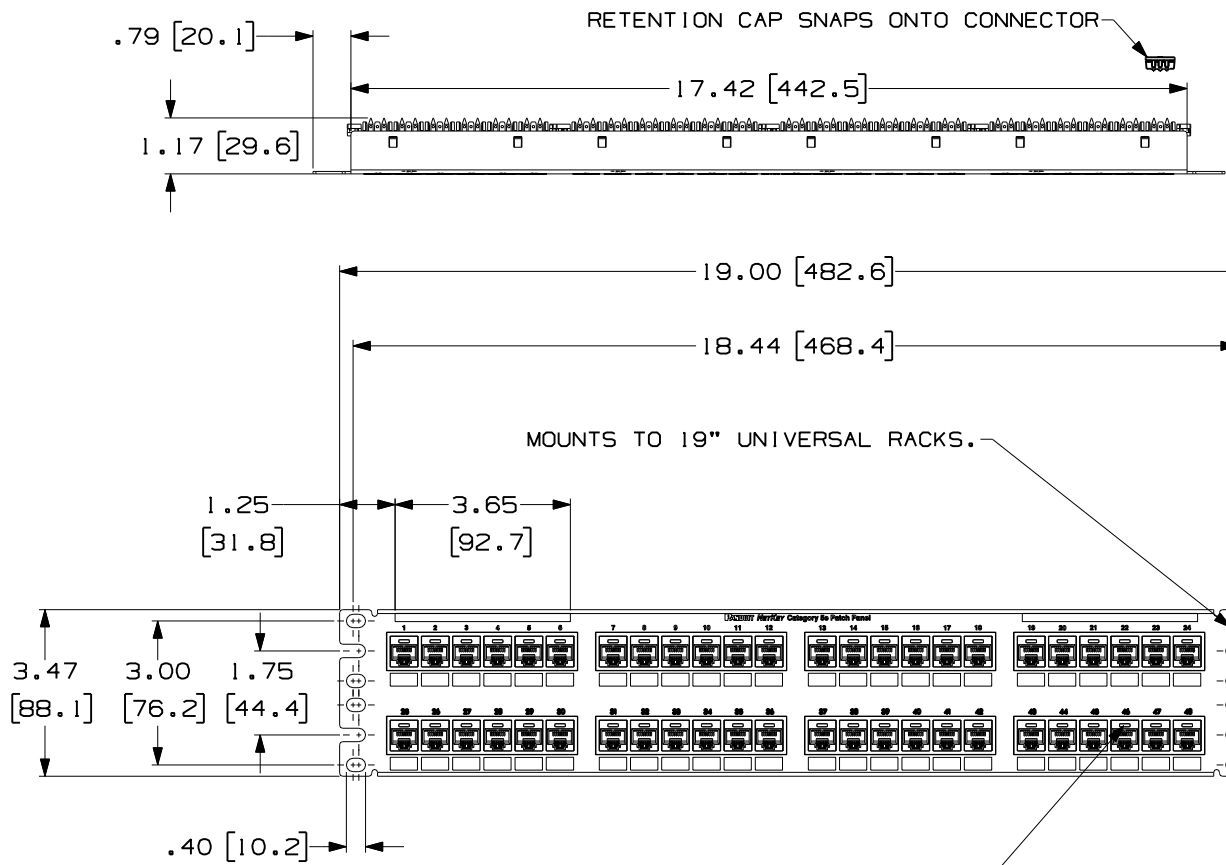

PANDUIT PART NO.	WEIGHT (APPOX.)
NK5EPPG48Y	2.2 lb (997.9 g)

NOTES:

- MATERIAL:  
 PANEL HOUSING: STEEL  
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0  
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0  
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B  
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 48 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6x1x15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

CID\*\*-C, PHONE OR DATA ICON LOCATED HERE, IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

MODEL FILENAME M02088AB_2RU_48PORT_PANEL_ASSY_06	SIZE A
DRAWING FILENAME M02479JM_DC249_00A	

TITLE  
NETKEY CAT5e 48 PORT PATCH PANEL CUSTOMER DRAWING



**PANDUIT**™  
CORP.  
TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.  
 DIMENSIONAL TOLERANCES ARE:  
 (.X) ±.03 (.XXX) ±.005  
 (.XX) ±.01 ANGLES ± 1°

THIRD ANGLE PROJECTION

DRAWN BY LZ	REVIEW DRAWING NUMBERS	I.I. NUMBER
DATE 3-4-06		PRODUCT SPEC
CHK'D		WORK INSTRUCTION
		SCALE .25 TO 1
		PART NO. SEE CHART
		DRAWING NO. 02479-249

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-4-06	LZ		RELEASED TO PRODUCTION	02479-249				