


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

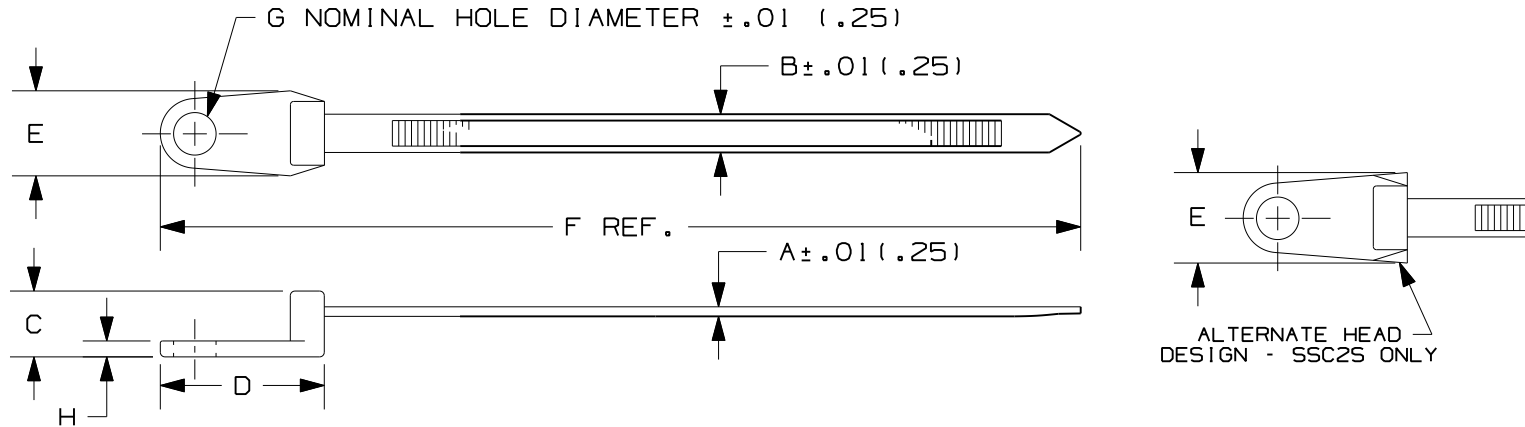

| PANDUIT PART NO.* | BUNDLE DIA.  |              | A<br>in<br>(mm) | B<br>in<br>(mm) | C<br>in<br>(mm) | D<br>in<br>(mm) | E<br>in<br>(mm) | F<br>in<br>(mm) | G<br>in<br>(mm) | H<br>in<br>(mm) | MIN. LOOP TENSILE lbs. (N) | CROSS-SECTION | RECM. FAST.    | WEIGHT lbs./100pcs. (g) |
|-------------------|--------------|--------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------------------|---------------|----------------|-------------------------|
|                   | MIN. in (mm) | MAX. in (mm) |                 |                 |                 |                 |                 |                 |                 |                 |                            |               |                |                         |
| SSC2S-S10         | .06 (1.5)    | 1.75 (44)    | .045 (1.1)      | .180 (4.6)      | .310 (7.9)      | .772 (19.6)     | .430 (10.9)     | 7.35 (187)      | .200 (5.1)      | .075 (1.9)      | 50 (222)                   | STANDARD      | #10 (M5) SCREW | .3 (136)                |
| SSC2S-S6          | .06 (1.5)    | 1.75 (44)    | .045 (1.1)      | .180 (4.6)      | .310 (7.9)      | .772 (19.6)     | .430 (10.9)     | 7.35 (187)      | .148 (3.8)      | .075 (1.9)      | 50 (222)                   | STANDARD      | #6 (M3) SCREW  | .3 (136)                |
| SSC4S-S10         | .06 (1.5)    | 4.00 (102)   | .045 (1.1)      | .180 (4.6)      | .310 (7.9)      | .772 (19.6)     | .400 (10.2)     | 15.67 (398)     | .200 (5.1)      | .075 (1.9)      | 50 (222)                   | STANDARD      | #10 (M5) SCREW | .5 (227)                |
| SSC4H-S25         | .06 (1.5)    | 4.00 (102)   | .065 (1.7)      | .300 (7.6)      | .460 (11.7)     | .930 (23.6)     | .530 (13.5)     | 15.55 (395)     | .260 (6.6)      | .110 (2.8)      | 120 (534)                  | HEAVY         | 1/4 (M6) SCREW | 1.3 (590)               |

NOTES:

- \*1) SEE [www.panduit.com](http://www.panduit.com) FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL AND PART COLOR.
- 2) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.

W10001EB/21-SS-600

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.

PANDUIT CORP. TINLEY PARK, ILLINOIS

STA-STRAP CLAMP CABLE TIES  
SSC SERIES

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ± .0005 (XXX) ± .020(.51)  
(.XX) ± .02(.5) ANGLES ± .0005

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

| REV | DATE    | BY   | CHK | DESCRIPTION  | ECN    | R   | CUST | SUP | DRAWN BY       | MAT'L     | SCALE | DRAWING NO. | DWG SIZE |
|-----|---------|------|-----|--|--------|-----|------|-----|----------------|-----------|-------|-------------|----------|
| --- | ----    | ---  |     | CHG NOTE 1, "SEE CURRENT PRICE..." TO "SEE <a href="http://www.panduit.com">www.panduit.com</a> ..." | ----   | --- |      |     | JABO           |           | NONE  |             |          |
| 21  | 2/15/11 | JABO | TGS | REMOVED PART, SEE ECN FOR DETAILS  | SS-600 | 21  | TGS  |     | DATE<br>1/8/02 | NYLON 6.6 |       | SS-600      | A        |
|     |         |      |     |  |        |     |      |     | CHK'D<br>JVL   |           |       |             |          |