




## LCG-3MVR Smart Strip® Specifications

### Features:

1. Adjustable current-sensing circuit allows a wide range of control devices to be used
2. Recessed, lighted On-Off switch with integrated 15 Amp circuit breaker
3. Ground indicator light
4. Surge circuit indicator light
5. 4' 14/3 SJT power-cord
6. 45° space-saver plug
7. 4-way wall-mountable
8. EMI/RFI noise filtering: Up to 50 dB from 100 KHz to 50 MHz
9. < 1 watt stand-by current draw

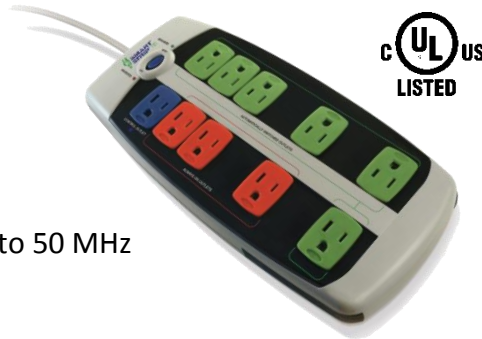

### Surge Protection Specifications:

1. Ten outlets total
  - a. 1 Control-outlet – Blue
  - b. 3 Always “On” outlets w/1 transformer space– Red
  - c. 6 Energy-Saving outlets w/3 transformer spaces – Green
2. Listed by Underwriters Laboratory 1449 3<sup>rd</sup> Edition and 1363 3<sup>rd</sup> Edition
3. Electrical Rating: 125 Volt AC 60 Hz, 15 Amperes, 1875 Watts
4. 4380 Joules of surge protection
5. Response Time: <1 nanosecond
6. Maximum Surge Voltage: 6000 Volts
7. Maximum Spike Current: 84,000 Amperes
8. 3-Line surge protection
9. Voltage Protection Rating:
  - a. 400 Volts L-N
  - b. 400 Volts L-G
  - c. 400 Volts N-G
10. Energy Savings of up to \$29.90 per year depending on connected equipment and local KWh rates.
11. \$30,000 Connected Equipment Warranty Protection – See warranty information on web-site for details; some exclusions apply.