


Voice/Data Adapter Kit – Diagram & Installation Instructions

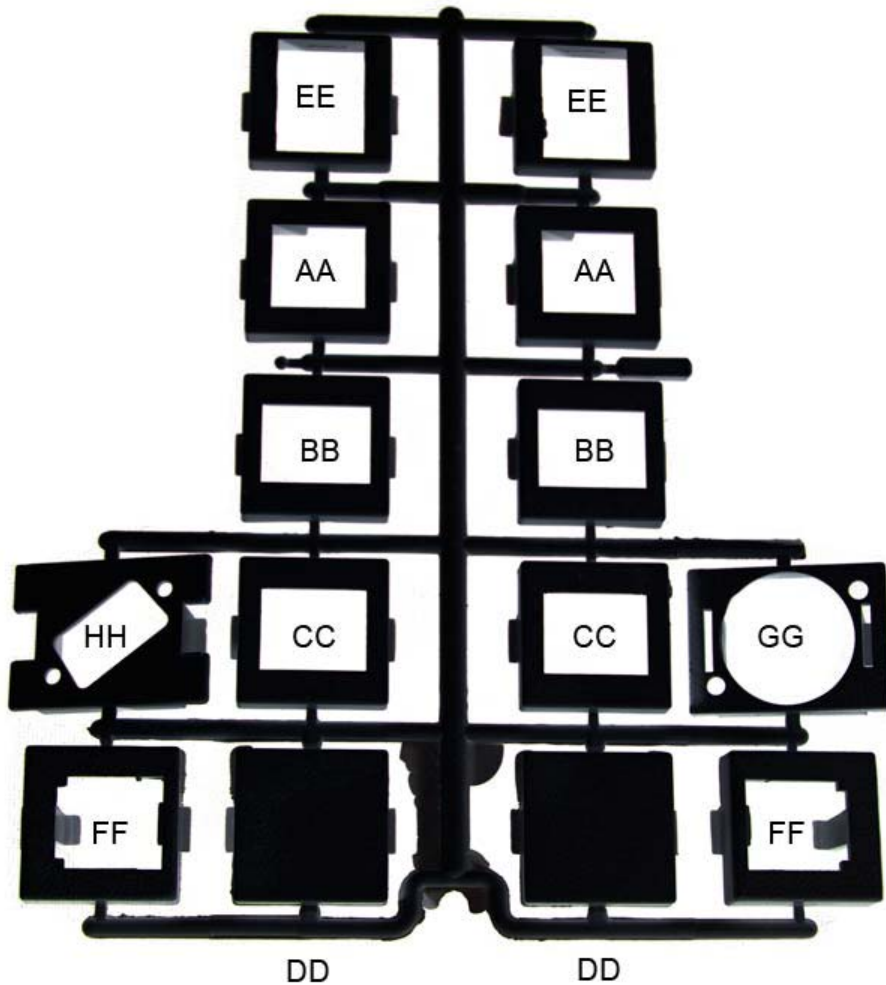

Adapter	Adapter Opening	Fits Manufacturer
AA	0.654" x 0.700"	Avaya, AT&T, Lucent Technologies
BB	0.594" x 0.792"	AMP, Tyco Cat 5, Panduit, Keystone Type, Allen Tel, Leviton
CC	0.594" x 0.792"	AMP, Tyco Cat 3 type, Krone Cat 5, Hubbell Cat 5
DD	n/a	Blank (no coupler/jack)
EE	0.665" x 0.930"	Ortronics TracJack Cat 6/5E/5
FF	0.626" x 0.660"	Panduit Mini-Com Connectors
GG	0.953" diameter	3" XLR (microphone)
HH	-	9 Pin Serial Adapter

Voice/Data Adapter Kit – Diagram & Installation Instructions

1. Select an adapter based on the above chart
2. Snap the jack into the adapter based on the instructions from the jack
3. Once connected, snap the adapter into the notched, square hole of either the power data center or plate (BE01439 optional)
4. If needed, snap the plate into any 1-3/8" x 2-3/4" opening

