

SIGNAMAX **CONNECTIVITY SYSTEMS**

Signamax™ Connectivity Systems Hardened Ethernet Switch

Model -065-7408PTB

065-7408P1FXSTTB

065-7408P1FXSCTB

065-7408P1FXSMTB


U S E R ' S G U I D E


Quick Start Guide


This quick start guide describes how to install and use the Hardened PoE Ethernet Switch. This is the switch of choice for harsh environments constrained by space.

Physical Description

The Terminal Block

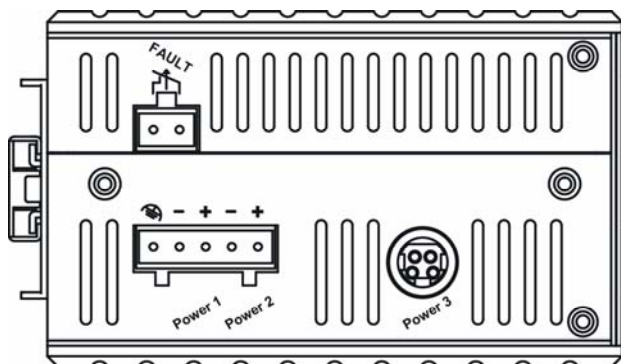

Power Input Assignment			
Power2	+	48VDC	Terminal Block
	-	Power Ground	
Power1	+	48VDC	
	-	Power Ground	
		Earth Ground	
Relay Alarm Assignment			

 FAULT	<p>*Relay warning signal disable for following: The relay contact closes if Power1 and Power2 are both failed but Power3 on. The relay contact closes if Power3 is failed but Power1 and Power2 are both on.</p>
---	--

DC Terminal Block Power Inputs: There are two pairs of power inputs can be used to power up this switch. Redundant power supplies function is supported.

The 10/100BaseT/TX and 100BaseFX Connectors

1. The 10/100BaseT/TX Connections

The following lists the pinouts of 10/100BaseT/TX ports.




Pin	Regular Ports	Uplink port
1	Input Receive Data +	Output Transmit Data +
2	Input Receive Data -	Output Transmit Data -
3	Output Transmit Data +	Input Receive Data +
4	NC	NC
5	NC	NC
6	Output Transmit Data -	Input Receive Data -
7	NC	NC
8	NC	NC

2. The 100BaseFX Connections


The fiber port pinouts: The Tx (transmit) port of device I is connected to the Rx (receive) port of device II, and the Rx

(receive) port of device I to the Tx (transmit) port of device II.




3. The WDM 100BaseFX Connections

The fiber port pinouts: Only one single-mode optical fiber is required to transmit and receive data.



The Port Status LEDs

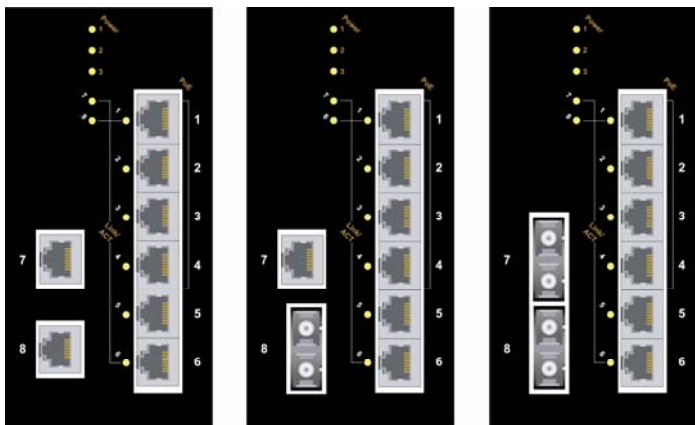



LED	State	Indication
10/100BaseT/TX, 100BaseFX		
Link/ACT (Green)	Steady	A valid network connection established.
	Flashing	Transmitting or receiving data. ACT stands for ACTIVITY.

Functional Description

- Meets IEC61000-6-2 EMC Generic Standard Immunity for industrial environment.
- Supports IEEE802.3af Power over Ethernet (PoE) Power Sourcing Equipment (PSE).
- Supports IEEE802.3/802.3u/802.3x. Auto-negotiation: 10/100Mbps, Full/Half-duplex, Auto-Negotiation, Auto MDI/MDIX.
- 100Base-FX: Multi/Single mode SC or ST type, WDM Single mode SC type.
- Supports 1024 MAC addresses. Provides 1M bits buffer memory.
- Alarms for power and port link failure by relay output.
- Power Supplies: Redundant 48VDC Terminal Block power inputs 100-240VAC external power supply.
- Operating voltage and Max. current consumption: 1.5A @ 48VDC. Power consumption: 72W Max.
- -40°C to 75°C (-40°F to 167°F) operating temperature range. Tested for functional operation @ -40°C to 85°C (-40°F to 185°F).
- Supports DIN-Rail, Panel, or Rack Mounting installation.

Assembly, Startup, and Dismantling

- Assembly: Place the switch on the DIN rail from above using the slot. Push the front of the switch toward the mounting surface until it audibly snaps into place.
- Startup: Connect the supply voltage to start up the switch via the terminal block.
- Dismantling: Pull out the lower edge and then remove the switch from the DIN rail.

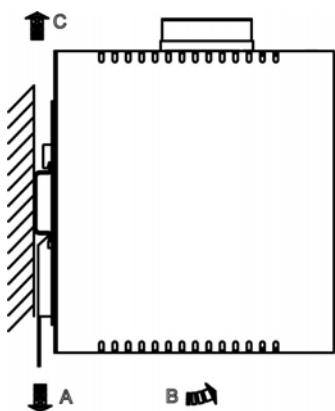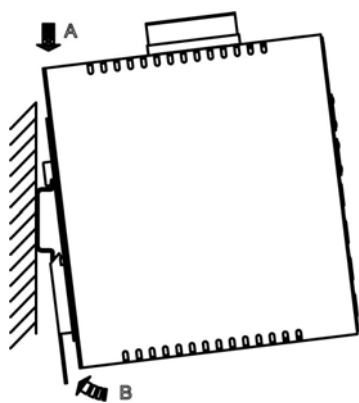

Preface

A member of the growing Signamax family of rugged switches, this Hardened PoE Ethernet Switch addresses a need for a smaller switch. This switch provides an affordable solution for rugged and outdoor environment, transportation road-side cabinet, industrial floor shop, multitenant dwellings or Fiber To The Home (FTTH) applications. Capable of operating at temperature extremes of -40°C to $+75^{\circ}\text{C}$, this is the switch of choice for harsh environments constrained by space.

Port 1 to port 4 on this Switch supports IEEE802.3af Power over Ethernet (PoE) Power Sourcing Equipment (PSE) and can detect an IEEE802.3af compliant Powered Device (PD). Using external 48VDC power inputs through Terminal Block, data and power can be transmitted to a Powered Device (PD) over the same twisted-pair Ethernet cable through port 1 to port 4 on the Switch.

This manual describes how to install and use the hardened Ethernet Switch. This switch integrates full wire speed switching technology. This switch brings the answer to complicated hardened networking environments.

To get the most out of this manual, you should have an understanding of Ethernet networking concepts.

In this manual, you will find:


- Features on the switch
- Illustrative LED functions
- Installation instructions
- Specifications

Table of Contents

QUICK START GUIDE	2
PHYSICAL DESCRIPTION	2
<i>The Terminal Block and Power inputs.....</i>	<i>2</i>
<i>The 10/100BaseT/TX and 100BaseFX Connectors</i>	<i>3</i>
<i>The Port Status LEDs.....</i>	<i>4</i>
FUNCTIONAL DESCRIPTION	6
ASSEMBLY, STARTUP, AND DISMANTLING.....	6
PREFACE.....	8
TABLE OF CONTENTS	9
PRODUCT OVERVIEW.....	10
HARDENED PoE ETHERNET SWITCH	10
PACKAGE CONTENTS	10
PRODUCT HIGHLIGHTS	11
<i>Basic Features.....</i>	<i>11</i>
FRONT PANEL DISPLAY.....	12
PHYSICAL PORTS	13
INSTALLATION	14
SELECTING A SITE FOR THE SWITCH	14
DIN RAIL MOUNTING	15
CONNECTING TO POWER	16
<i>Redundant DC Terminal Block Power Inputs.....</i>	<i>16</i>
<i>Alarms for Power and Port Link Failure.....</i>	<i>17</i>
CONNECTING TO YOUR NETWORK	18
<i>Cable Type & Length.....</i>	<i>18</i>
<i>Cabling.....</i>	<i>19</i>
SPECIFICATIONS.....	20
CONTACT INFORMATION.....	22

Product Overview

Hardened PoE Ethernet Switch

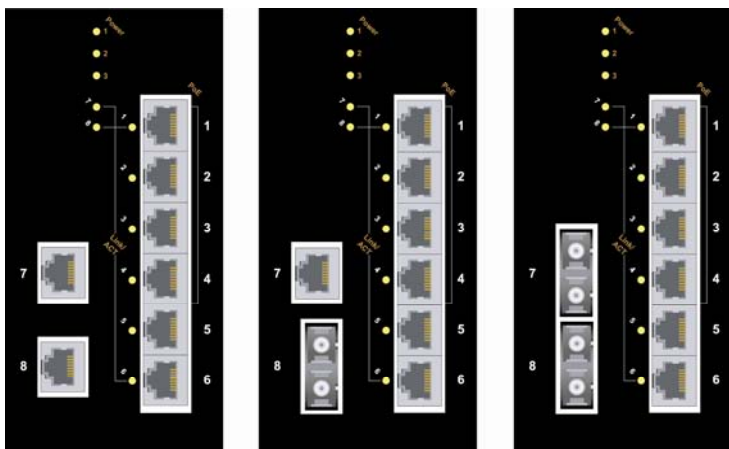

Package Contents

When you unpack the product package, you shall find the items listed below. Please inspect the contents, and report any apparent damage or missing items immediately to your authorized reseller.


- ✓ ***This Switch***
- ✓ ***User's Manual***

Product Highlights

Basic Features

- Meets NEMA TS1 & TS2 Environmental requirements such as temperature, shock, and vibration for traffic control equipment.
- Meets IEC61000-6-2 EMC Generic Standard Immunity for industrial environment.
- Supports IEEE802.3af Power over Ethernet (PoE) Power Sourcing Equipment (PSE).
- Support 802.3/802.3u/802.3X.
- Auto-negotiation: 10/100Mbps, Full/Half-duplex; Auto MDI/MDIX.
- Support 1024 MAC addresses.
- Provides 1M bits memory buffer.
- Alarms for power and port link failure by relay output.
- Operating voltage and Max. current consumption: 1.5A @ 48VDC. Power consumption: 72W Max.
- Power Supplies: Redundant 48VDC Terminal Block power inputs 100-240VAC external power supply.
- -40°C to 75°C (-40°F to 167°F) operating temperature range. Tested for functional operation @ -40°C to 85°C (-40°F to 185°F).
- Supports DIN-Rail, Panel, or Rack Mounting installation.

Front Panel Display

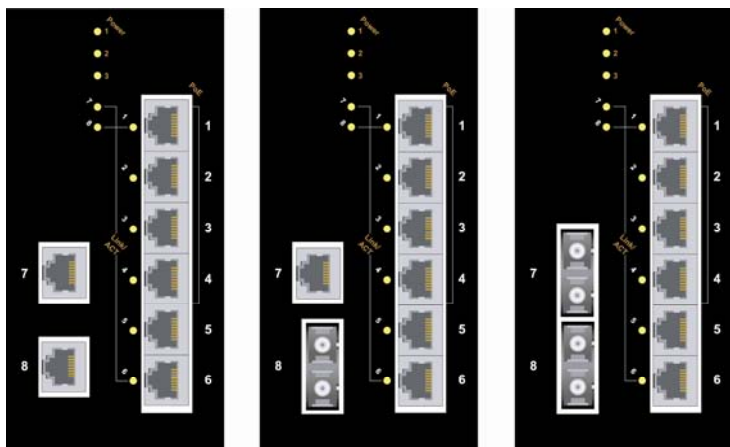

Status LEDs

LED	State	Indication
POWER		
Power 1 Power 2	Steady	Switch is properly connected to power and turned on.
Power 3 (Green)	Off	Switch is not connected to power and is turned off.
10/100TX or 100FX		
Link/ACT (Green)	Steady	A valid network connection established.
	Flashing	Transmitting or receiving data. ACT stands for ACTIVITY.

Physical Ports

This switch provides:

- Eight 10/100BaseT/TX ports
- Seven 10/100BaseT/TX ports + one 100BaseFX port
- Six 10/100BaseT/TX ports + two 100BaseFX ports

CONNECTIVITY

- RJ-45 connectors
- SC or ST connector on 100BaseFX fiber port.

Installation

This chapter gives step-by-step instructions about how to install the switch:

Selecting a Site for the Switch

As with any electric device, you should place the switch where it will not be subjected to extreme temperatures, humidity, or electromagnetic interference. Specifically, the site you select should meet the following requirements:


- The ambient temperature should be between -40 to 75 degrees Celsius.
- The relative humidity should be less than 95 percent, non-condensing.
- Surrounding electrical devices should not exceed the electromagnetic field (RF) standards.
- Make sure that the switch receives adequate ventilation. Do not block the ventilation holes on each side of the switch
- The power outlet should be within 1.8 meters of the switch.

DIN Rail Mounting

Fix the DIN rail attachment plate to the back panel of the switch.

Installation: Place the switch on the DIN rail from above using the slot. Push the front of the switch toward the mounting surface until it audibly snaps into place.

Removal: Pull out the lower edge and then remove the switch from the DIN rail.

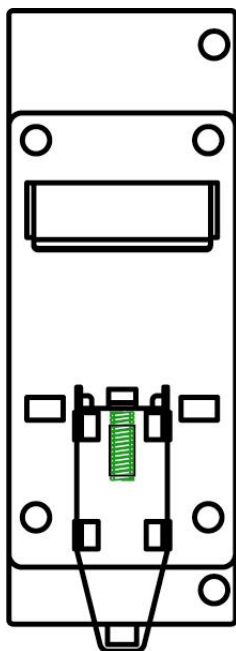

Connecting to Power

Redundant DC Terminal Block Power Inputs.

Redundant DC Terminal Block Power Inputs



There are two pairs of power inputs can be used to power up this device. You only need to have one power input connected to run the switch.

Step 1: Connect the DC power cord to the plug-able terminal block on the switch, and then plug it into a standard DC outlet.

Step 2: Disconnect the power cord if you want to shut down the switch.

Alarms for Power and Port Link Failure

Step 1: There are two pins on the terminal block are used for power failure detection. It provides the normally closed output when the power source is active. Use this as a dry contact application to send a signal for power failure detection.

Power Input Assignment			
Power2	+	48VDC	Terminal Block
	—	Power Ground	
Power1	+	48VDC	
	—	Power Ground	
		Earth Ground	
Relay Alarm Assignment			
 FAULT	*Relay warning signal disable for following: The relay contact closes if Power1 and Power2 are both failed but Power3 on. The relay contact closes if Power3 is failed but Power1 and Power2 are both on.		

Special note:

The relay output is normal open position when there is no power to the switch. Please do not connect any power source to this terminal to prevent the shortage to your power supply.

Connecting to Your Network

Cable Type & Length

It is necessary to follow the cable specifications below when connecting the switch to your network. Use appropriate cables that meet your speed and cabling requirements.

Cable Specifications

Speed	Connector	Port Speed Half/Full Duplex	Cable	Max. Distance
10BaseT	RJ-45	10/20 Mbps	2-pair UTP/STP Cat. 3, 4, 5	100 m
100BaseTX	RJ-45	100/200 Mbps	2-pair UTP/STP Cat. 5	100 m
100BaseFX	SC, ST	100/200 Mbps	MMF (50 or 62.5 μ m)	2 km
100BaseFX	SC, ST	100/200 Mbps	SMF (9 or 10 μ m)	20, 40, or 75 km

Cabling

Step 1: First, ensure the power of the switch and end devices is turned off.

<Note> Always ensure that the power is off before any installation.

Step 2: Prepare cable with corresponding connectors for each type of port in use.

Step 3: Consult the previous section for cabling requirements based on connectors and speed.

Step 4: Connect one end of the cable to the switch and the other end to a desired device.

Step 5: Once the connections between two end devices are made successfully, turn on the power and the switch is operational.

Specifications

Hardened PoE Ethernet Switch	10/100BaseT/TX auto-negotiating ports with RJ-45 connectors, 100BaseFX fiber ports
Applicable Standards	IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX/FX
Switching Method	Store-and-Forward
Forwarding Rate	
10BaseT:	10 / 20Mbps half / full-duplex
100BaseTX/FX:	100 / 200Mbps half / full-duplex
Performance	14,880pps for 10Mbps 148,810pps for 100Mbps
Cable	
10BaseT:	4-pair UTP/STP Cat. 3, 4, 5
100BaseTX:	4-pair UTP/STP Cat. 5 Up to 100m (328ft)
100BaseFX:	MMF (50 or 62.5µm), SMF (9 or 10µm)
LED Indicators	Per unit – Power status (Power 1, Power 2, Power 3) Per port – 10/100TX or 100FX - Link/ACT (Green)
Dimensions	68mm (W) × 110mm (D) × 135mm (H) (2.68" (W) × 4.33" (D) × 5.31" (H))
Net Weight	1Kg (2.2lbs.)
Power	Terminal Block: 48VDC External AC/DC required
Operating Voltage & Max. Current Consumption	1.5A @ 48VDC
Power Consumption	72W Max.
Operating Temperature	-40°C to 75°C (-40°F to 167°F) Tested for functional operation @ -40°C to 85°C (-40°F to 185°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Humidity	5%-95% non-condensing
Safety	UL508, EN60950-1, IEC60950-1

EMI

FCC Part 15, Class A

EN61000-6-3:

EN55022

EN61000-3-2

EN61000-3-3

EMS

EN61000-6-2:

EN61000-4-2 (ESD Standard)

EN61000-4-3 (Radiated FRI Standards)

EN61000-4-4 (Burst Standards)

EN61000-4-5 (Surge Standards)

EN61000-4-6 (Induced RFI Standards)

EN61000-4-8 (Magnetic Field Standards)

EN61000-4-11 (Voltage Dips Standards)

Environmental Test Compliance

IEC60068-2-6 Fc (Vibration Resistance)

IEC60068-2-27 Ea (Shock)

IEC60068-2-32 Ed (Free Fall)

NEMA TS1/2 Environmental requirements for traffic control equipment

Contact Information

SIGNAMAX™ CONNECTIVITY SYSTEMS

An AESP Company

1810 N.E. 144th Street.

North Miami, Florida 33181, U.S.A.

Phone: 305-944-7710 Fax: 305-652-8489

Sales: 800-446-2377 Tech. Support: 800-446-2377, ext. 201

[Http://www.signamax.com](http://www.signamax.com)

E-mail: info@signamax.com